


# Industrial Monitor

## Style 660

### Unique Features of Protek Industrial Monitors

- 1 Flow turning vanes in each elbow efficiently reduce friction
- 2 Powder coating produces a tough, corrosion resistant finish
- 3 Positive friction locks with brass knob for both horizontal and vertical travel to hold desired position
- 4 Stainless steel lever for durability and easy control
- 5 Major components made from brass alloy (UNS C83600, ASTM B62) for a long-lasting Service life
- 6 Optional flanges : ANSI, ASA, DIN or ISO
- 7 Double-row stainless steel ball bearings in monitor joints ensure smooth movements even when the monitor is under pressure
- 8 Compatible with Protek's diverse range of monitor nozzles and smooth bore tips for various applications

Style 660 monitor shown with  
Style 109 stream shaper and  
Style 121 Quad Stacked Tips

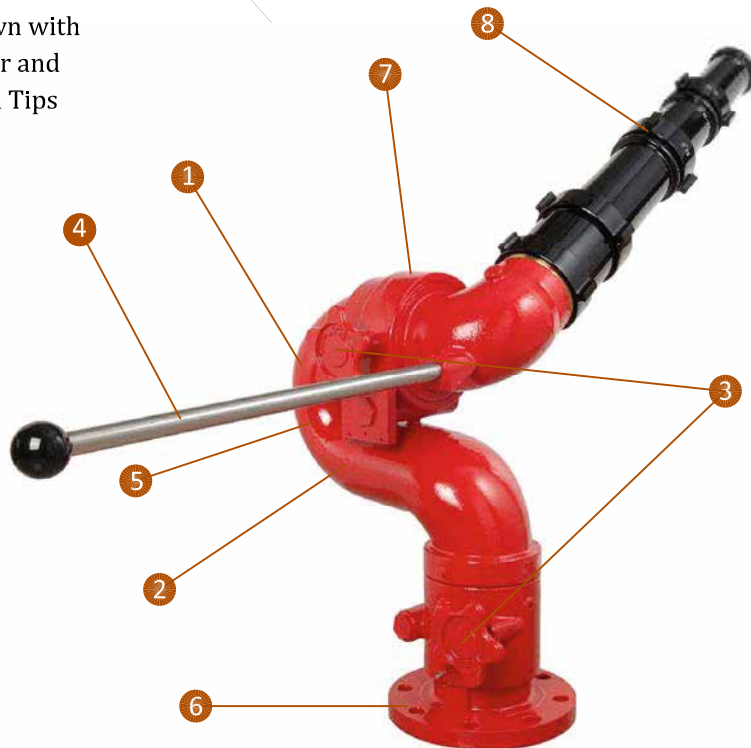

# Industrial Monitor

## Style 660

- Corrosion resistant brass construction ideal for marine, offshore, industrial and other corrosive environments
- Full 4-1/4" waterway for flow rate of up to 2000 GPM (7570 LPM)
- Cast-in turning vanes for efficient flow
- Full 360° rotation
- Vertical travel of 135° from 90° above and 45° below horizontal
- Positive friction locks with brass knob for both horizontal and vertical travel to hold desired position
- Operating pressure of 200 psi (14 bar)
- Stainless steel lever for durability and easy control



## Specification

Style 660					
Max. GPM (LPM)	2000 (7570)		Material	Brass	
Inlet	Size	4"	6"	Finish	Red Powder Coating
	Type	Flange			
Outlet	3-1/2"		Weight	97 lbs (48 kg) to 110 lbs (50 kg)	

## Compatible Products



837-BC  
Monitor Nozzle



833  
Automatic Nozzle



109  
Stream Shaper



121  
Quad Stacked Tips

